



Safety Direct Product Catalogue

"Fall Protection You Can Live With"



HARNESSES

Parachute Style

1

Crossover Style

2

Vest Style

3

Womens

4

Extra Large

5

Combo

6

Scaffolding

7

Maximum Visibility

8

Fire Resistant

9

Accessories

10

Harness Sizing Chart

11

LANYARDS

Polyester

12

Nylon

13

Kevlar

14

Rope

15

Adjustable

16

Extensible

17

In-Line

18

Tie Back

19

Type 1 Retractable

20

Dorsal Extensions

21

Connecting Hardware

22

ACCESSORIES

Trauma Straps

23

Lanyard Keepers

23

ACCESSORIES

Tool Leash

24

Rebar Chain

24

Carry Bags

25

Rope Bags

26

Lifting Cradles

27

LIFELINES

Self Retracting

28

Horizontal

29

RESCUE

Block & Tackle

30

Components

31

Confined Space

32

ANCHORS

Anchor Slings

33

Anchor Straps

34

I Beam Anchors

35

Anchorage Connectors

36

Roof Anchors

37

ROOFERS KITS

38

INSPECTIONS

39



Model MH101

Parachute style full body harness



Available webbing

- Regular Polyester in red (shown), blue, yellow
- Maximum Visibility
- Kevlar (fire resistant)

Custom sizes

Add on accessories

Choice of connectors

- Pass through buckles
- Quick connect buckles
- Grommets (legs only)

Add on custom identification to the chest strap



CSA Class



A- Fall Arrest



E- Confined Entry or Exit



P - Work Positioning

P
A
R
A
C
H
U
T
E

S
T
Y
L
E

SAFETY DIRECT LTD.

Fall Protection Equipment Manufacturer



C
R
O
S
S
O
V
E
R

S
T
Y
L
E

Model MH201

Crossover style full body harness. Patented design.



Available webbing

- Regular Polyester in red (shown), blue, yellow
- Maximum Visibility
- Kevlar (fire resistant)

Custom sizes

Add on accessories

Choice of connectors

- Pass through buckles
- Quick connect buckles
- Grommets (legs only)

Add on custom identification to the shoulder strap



CSA Class



A- Fall Arrest



D - Controlled Descent



E- Confined Entry or Exit



L - Ladder Climbing



P - Work Positioning



Model MH301

Vest style full body harness



Available webbing

- Regular Polyester in red (shown), blue, yellow
- Maximum Visibility
- Kevlar (fire resistant)

Custom sizes

Add on accessories

Choice of connectors

- Pass through buckles
- Quick connect buckles
- Grommets (legs only)

Add on custom identification to the shoulder strap



CSA Class



A - Fall Arrest



D - Controlled Descent



E - Confined Entry or Exit



L - Ladder Climbing



P - Work Positioning

V
E
S
T

S
T
Y
L
E



Model MHROSE

Crossover style harness with removable shoulder pads (BJSP003). Patented design.



Shown with trauma straps (optional) and a front oval link (optional)

Available webbing

- Regular Polyester in red (shown), blue, yellow
- Maximum Visibility
- Kevlar (fire resistant)

Custom sizes

Add on accessories

Choice of connectors

- Pass through buckles
- Quick connect buckles
- Grommets (legs only)

Custom identification available

CSA Class



A- Fall Arrest



D - Controlled Descent



E- Confined Entry or Exit



L - Ladder Climbing



P - Work Positioning



Model MHBIGGUY

Parachute style harness in size 2XL with a permanently attached E6 energy absorbing Y lanyard and a capacity of 386lb.



Attached lanyard can be configured with any combination of snap, ladder or scaffold hooks (shown)

Available webbing

- Regular Polyester in red (shown), blue, yellow
- Maximum Visibility
- Kevlar (fire resistant)

Custom sizes

Add on accessories

Choice of connectors

- Pass through buckles
- Quick connect buckles
- Grommets

Custom identification available

CSA Class



A- Fall Arrest



D - Controlled Descent



E- Confined Entry or Exit



L - Ladder Climbing



P - Work Positioning

EXTRA LARGE HARNESS



Model MH1011130

Parachute style harness with aluminum D rings and a permanently attached belt pad



Available webbing

- Regular Polyester in red (shown), blue, yellow
- Maximum Visibility
- Kevlar (fire resistant)

Custom sizes

Add on accessories

Choice of connectors

- Pass through buckles
- Quick connect buckles
- Grommets

Custom identification available

CSA Class



A- Fall Arrest



E- Confined Entry or Exit



P - Work Positioning

SAFETY DIRECT LTD.

Fall Protection Equipment Manufacturer



SCAFFOLDING HARNESS

Model MHSCAFF

Parachute style polyester harness
with X-style D shim and 3-Bar slide



Special shim
keeps the
D-ring from
moving out
of adjustment

CSA Class



A- Fall Arrest



E- Confined
Entry or Exit



P - Work
Positioning

MAXIMUM VISIBILITY

SAFETY DIRECT LTD.

Fall Protection Equipment Manufacturer



Maximum Visibility polyester webbing with 5 rows of reflective material on both sides



Remain visible in low level lighting conditions

Available for all our harness styles

CSA Class



A- Fall Arrest



D - Controlled Descent



E- Confined Entry or Exit



L - Ladder Climbing



P - Work Positioning



Kevlar (Fire Resistant)

Durable Kevlar® webbing is resistant to extreme heat and burn conditions



Ideal for welding applications

Available for all our parachute and crossover style harnesses

CSA Class



A- Fall Arrest



D - Controlled Descent



E- Confined Entry or Exit



L - Ladder Climbing



P - Work Positioning

FIRE RESISTANT



Combination Shoulder and Back Pad

-- Removable



BJXP001

Parachute harnesses

BJXP002

Crossover harnesses

BJSP001



Leg or Shoulder Pads

- Sold Individually

- Removable



BKEL881SML


Belt and Back Pad

- Available for S,M, L & XL

- Removable



Harness Sizing Chart

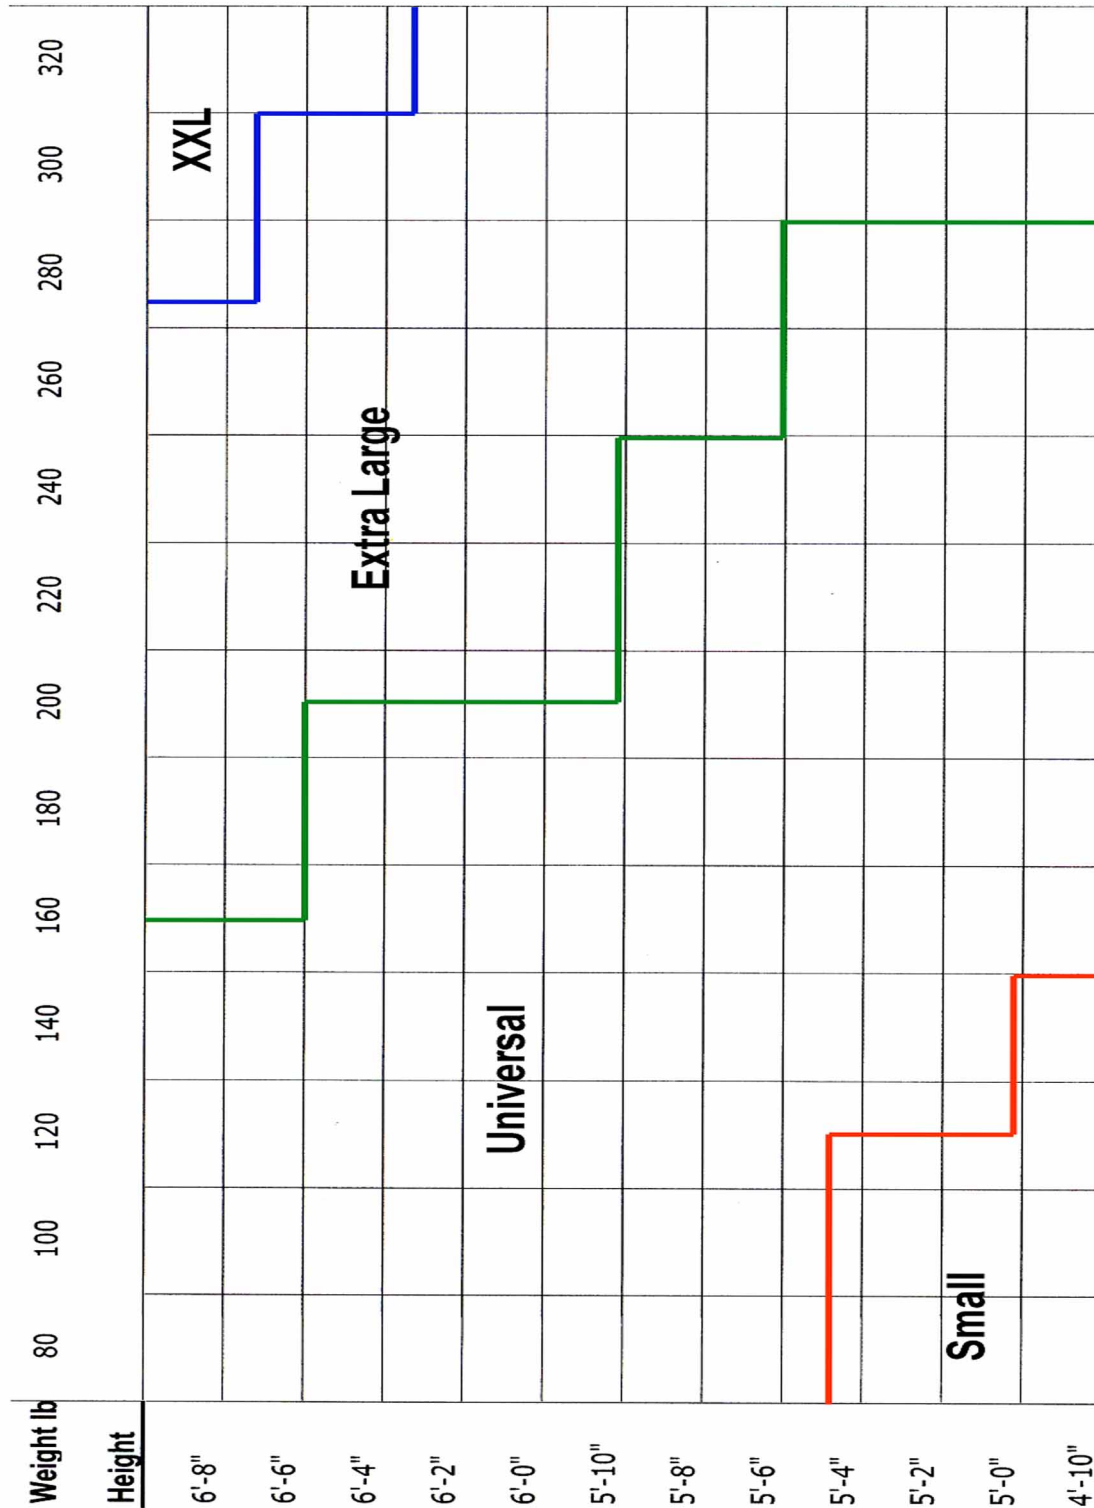



MLYW Energy Absorbing Bypass Y



MLSW Energy Absorbing Single Leg

Non adjustable
Available in 4ft, 5ft or 6ft lengths
Snap, Ladder or Scaffold hooks
E4 (100lb/45kg to 254lb/115kg) or E6 (200lb/91kg to 386lb/175kg)
Optional custom identification
Available in High Visibility webbing



MLNW

Non-Energy Absorbing Single Leg
1 3/4 inch nylon web



MLNY

Non-Energy Absorbing Bypass Y
1 3/4 inch nylon web

MLSN

Energy Absorbing Single Leg
1 inch nylon web



Available in 4ft, 5ft or 6ft lengths
Single or Double (100% Tie Off) legs
Non-Energy Absorbing (to 310lb/140kg)
Energy Absorbing E4 (100lb/45kg to 254lb/115kg)
Energy Absorbing E6 (200lb/91kg to 386lb/175kg)
Snap, Ladder or Scaffold hooks

N
Y
L
O
N

L
A
N
Y
A
R
D
S

SAFETY DIRECT LTD.

Fall Protection Equipment Manufacturer



**K
E
V
L
A
R

L
A
N
Y
A
R
D
S**



MKYW Energy Absorbing Bypass Y

MKSW
Energy Absorbing
Single Leg



Fire Resistant

Available in 4ft, 5ft or 6ft lengths

Snap, Ladder or Scaffold hooks

Single or Double (100% Tie Off) legs

E4 (100lb/45kg to 254lb/115kg) or E6 (200lb/91kg to 386lb/175kg)

Energy absorber can be Kevlar or Polyester

Optional custom identification



MLSS

Energy Absorbing



MLPS

Non Energy Absorbing



**R
O
P
E

L
A
N
Y
A
R
D
S**

Available in 4ft, 5ft or 6ft lengths

Energy Absorbing E4 (100lb/45kg to 254lb/115kg)

Energy Absorbing E6 (200lb/91kg to 386lb/175kg)

Non-Energy Absorbing (to 310lb/140kg)

Snap, Ladder or Scaffold hooks



MLYW 300 Series Energy Absorbing Bypass Y



MLSW 300 Series Energy Absorbing Single Leg



Available in 4 ft, 5ft or 6ft lengths
Snap, Ladder or Scaffold hooks
Optional custom identification
Available in High Visibility webbing

E4 (100lb/45kg to 254lb/115kg) or E6 (200lb/91kg to 386lb/175kg)



MESW Energy Absorbing Single Leg



MEYW Energy Absorbing Bypass Y

Available in 5ft or 6ft Lengths

Non-Energy Absorbing (to 310lb/140kg)

Energy Absorbing E4 (100lb/45kg to 254lb/115kg)

Energy Absorbing E6 (200lb/91kg to 386lb/175kg)

Single or Double (100% Tie Off) legs

Snap, Ladder or Scaffold hooks



MBYW Bypass Y

MBSW Single Leg



The "BUNGEE" lanyard

6ft length only

Energy Absorbing only

E4 (100lb/45kg to 254lb/115kg) only

Single or Double (100% Tie Off) legs

Snap, Ladder or Scaffold hooks



Tieback Lanyards

MLSN Single Leg

MLYT Bypass Y



Tieback Hook

- Drop forged steel
- Heat treated
- 100% proof loaded at 3600lbs (16.0kN)
- Minimum breaking strength 5000lbs (23kN)

1 inch nylon webbing

Single or Double (100% Tie Off) legs

Non-Energy Absorbing (to 310lb/140kg)

Energy Absorbing E4 (100lb/45kg to 254lb/115kg)

Energy Absorbing E6 (200lb/91kg to 386lb/175kg)



NRWL

Retractable Web Lanyards



Available in 6 ft, 7 ft or 8 ft lengths

Non-Energy Absorbing (to 310lb/140kg)

Energy Absorbing E4 (100lb/45kg to 254lb/115kg)

Energy Absorbing E6 (200lb/91kg to 310lb/140kg)

Single or Double (100% Tie Off) legs

Comes with Snap, Ladder or Scaffold hooks



Extensions can be permanently attached to
any harness



MLSW
Energy Absorbing

MLEW
Non Energy Absorbing



Extension length from 18 to 24 inches
Energy Absorbing E4 (100lb/45kg to 254lb/115kg)
Energy Absorbing E6 (200lb/91kg to 386lb/175kg)
Available with:

Snap Hook & D Ring

Soft Loop & D Ring

Polyester, Kevlar or Max Visibility webbing

SAFETY DIRECT LTD.

Fall Protection Equipment Manufacturer



Drop forged steel. Heat treated.
Minimum breaking load: 5000lbs (23 kN)
100% proof loaded at 3600lbs (16 kN)
3600lb (16 kN) Gate Rating



SNAP HOOK

3/4 inch opening
2 3/8 inch wide
5 9/16 inch long
13.7 oz. / 390 grams

LADDER HOOK

1 3/4 inch opening
3 7/8 inch wide
7 9/16 inch long
19.1 oz. / 543 grams



SCAFFOLD HOOK

2 1/2 inch opening
4 5/8 inch wide
9 inch long
27.8 oz. / 788 grams



MSTS Trauma Strap

- Capacity per pair 180kg (400lbs)
- Two relief steps
- Attachment options
 - Sewn onto harness
 - Choke On loops
 - Carabiner



MLLK Tear Away Lanyard Keeper

- Velcro attachment to any strap



BJLK Snap Lanyard Keeper

- Snaps over any strap



MATL100

- Capacity 15lbs
- Looped for attachment to waistbelt or wrist
- Stretches to 42"

MARS001

- 1/4" galvanized PC chain -
Available with multiple connectors -



SAFETY DIRECT LTD.



Fall Protection Equipment Manufacturer

RBSS01

Small Stuff Sack



Perfect size for
storing a harness
and lanyard in
your work truck

RBSS02

Large Stuff Sack



RBWL

Ladder Bags

C
A
R
R
Y

B
A
G
S

Multi purpose bags made of heavy duty Cordura
Large bags have shoulder straps for easy transport
Custom identification available



ROPE BAGS

RBL650

Stores 800ft of 7/16" rope
or 300ft of 5/8" rope



RBS150

Stores 200ft of 7/16" rope
or 100ft of 5/8" rope



RBM350

Stores 400ft of 7/16" rope
or 225ft of 5/8" rope



Multi purpose rope bags are made of heavy duty Cordura and have a vented bottom to prevent mildew. Large bags have shoulder straps for easy transport.



MFCC101

Fire Extinguisher



MPCC101

Propane Cylinder



MWCC101

Water Cooler



MRSS001 Carry Strap



- Rated for 100 lb load with a 10x safety factor
 - Manufactured with maximum visibility webbing for day or night working conditions
 - All cradles have a lower ring to attach a tag line for safe hoisting
 - Optional polyester carry strap is adjustable up to 5 1/2 feet.
- Shown with optional shoulder pad (BJSP001)

SAFETY DIRECT LTD.

Fall Protection Equipment Manufacturer



Single person fall protection device
Swivel eye for maximum mobility
Double locking steel carabiner



RDW web retractables

- CSA Type 1
- 7, 10 feet
- aluminum housing
- 1 inch Dyneema webbing
- optional hooks
- dual leg configuration



RDC cable retractables

- CSA Type 2
- 11, 15, 20, 30, 50, 75 feet
- polymer housing
- 0.19 inch galvanized steel cable
- load indicating swivel snap hook



HLLA3 8xxx



Capacity 620lbs (Two Workers)

Includes:

- 3/8" (9.5mm) diameter galvanized steel wire rope
- Jaw & Jaw turnbuckle tensioning device
- Adjustable combination thimble clamp
- Energy absorber
- Two sliding rings
- Two auto-locking carabiners

Length	Part Number
30ft	HLLA38030
60ft	HLLA38060
100ft	HLLA38100

SAFETY DIRECT LTD.

Fall Protection Equipment Manufacturer



- Ready to use right out of the bag
- 4 to 1 ratio. Minimal 25 lb force required to hold a 100 lb load
- Pulleys equipped with anti-reversing bearings
- Ascender provides a backup system when attached to both the operating rope and the user in case of accidental release of the operating rope
- Versatile (can be used for both rescue and controlled access)
- 2 person rated for rescue
- Low maintenance
- Back Pack style rope bag

LENGTH	
30ft (9m)	RBTS30
50ft (15m)	RBTS50
75ft (22m)	RBTS75
100ft (30m)	RBTS100
150ft (45m)	RBTS150
200ft (60m)	RBTS200





SRSD14
Sarab Descent Device



BRRF260
Right Hand Ascender



N259/2
Scaffold Carabiner



N2853G
Aluminum Carabiner




RLNW
Rescue Rope Ladder with carry bag
- 1 inch nylon webbing
- reinforced fibreglass rungs
- capacity 2 persons 620lbs/282kg



C
O
N
F
I
N
E
D

S
P
A
C
E

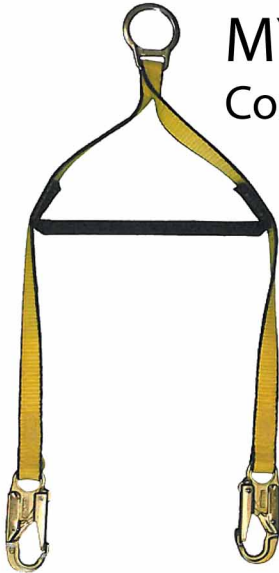

MYRS001

Confined Space Extraction Yoke



BTT30012

7ft Tripod
(29lbs)

BTT30014

10ft Tripod
(34lbs)

Static strength - minimum 5000lbs (22.2kN)

Maximum 3 workers

Steel & aluminum components



WRL25xx



TYPE 1

Thimble Eyes on Each End

WRL25xxA



TYPE 2

Snap Hook & O Ring

1/4"-5/16" vinyl coated cable
Flemish spliced eyes
5000lbs breaking strength

Other Connection Options Are Available

A
N
C
H
O
R

S
L
I
N
G
S



MACD

Cast In Place Concrete anchor



Attached sleeve protects the webbing from corrosion and abrasion


MALD

Single D Choker style



MADD

Double D Choker style



MATS

Double soft loop Choker style



2" durable polyester webbing
Minimum tensile strength 5000lbs



BVFB1526

Vertical Clamping Flangebar - for use where a temporary or permanent stationary anchorage is required. Designed to clamp tightly onto the horizontal **or** vertical flange of a beam and easily removed to place at another location.

Fits Beams 4" to 26" wide x 1.5" in thickness



BCFB3018

Clamping Flangebar - for use where a temporary or permanent stationary anchorage is required. Designed to clamp tightly onto the horizontal flange of a beam and easily removed to place at another location.

Fits Beams 6" to 18" wide x 1.125" in thickness



BQFB001

Sliding Flangebar with Quick Ratchet Locking System - for use where a temporary or permanent stationary anchorage is required. Designed to attach to the top **or** bottom of horizontal beams. Its unique design allows it to slide smoothly along the flange of the beam to follow the worker while maintaining 100% tie off.

Fits Beams 3" to 13" wide x 1.125" in thickness



RP3732-1



1/2" Clearance Hole

RP3732-2



5/8" Clearance Hole

RP3732-3



3/4" Clearance Hole

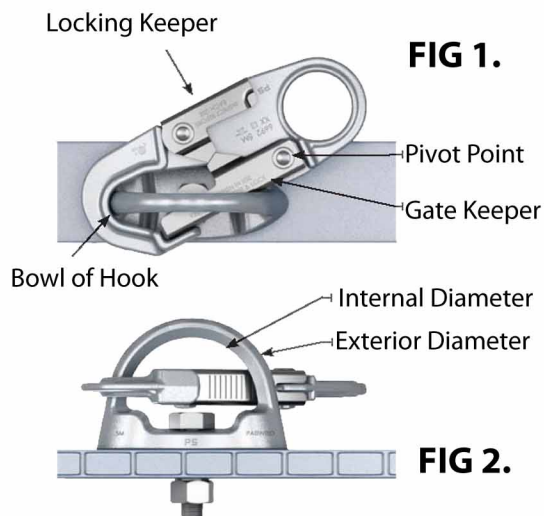


FIG 1.

FIG 2.

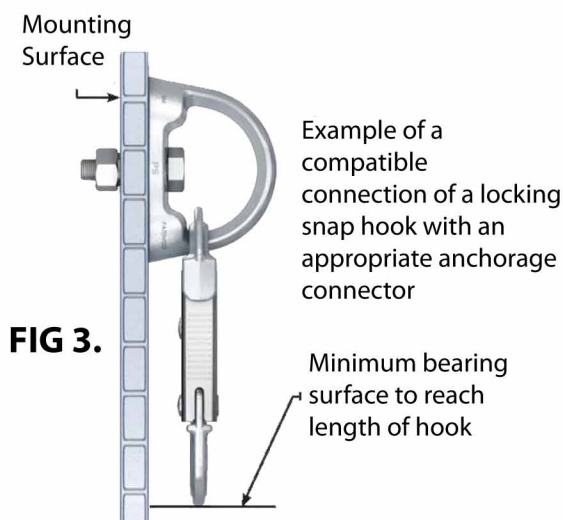


FIG 3.

Drop Forged - Alloy Steel
100% Proof Loaded to 3 600lbs (16kN)
Minimum Tensile Strength 5 000lbs (2.2kN)
Weight approx. 16oz (450 g)

Compatibility of Locking Snap Hooks with Anchorage Connectors

It is strongly recommended that:

- The design of the anchorage connector must be such that no dynamic force is applied to the keeper system of the locking snap hook (Figures 1 & 2)
- The anchorage connector system should be configured such that the locking snap hook will self correct under dynamic loading. The anchorage connector system should never be configured such that dynamic loading could be placed on the keeper system.
- The entire base of the anchorage connector system must be flush with the mounting surface. (Figure 3)
- The area of the mounting surface for the anchorage connector must be such that no dynamic forces can be placed on the keeper system. (Figure 4)

It is the responsibility of the purchaser to ensure that any component utilized is compatible within the system designed and with other components that may be used in conjunction.

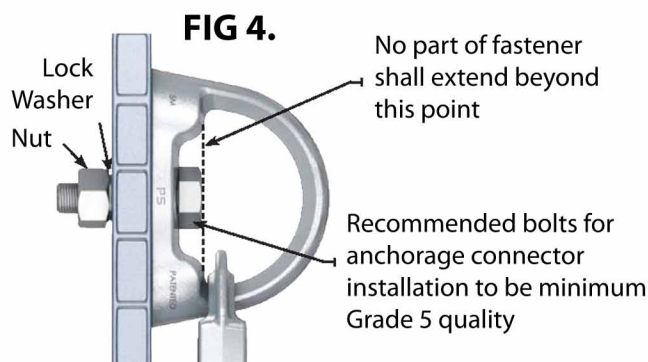


FIG 4.

Recommended Torque Values:

- 65-75 ft-lb for a 1/2" Clearance Hole (13 TPI Bolt)
- 145-155 ft-lb for a 5/8" Clearance Hole (11 TPI Bolt)
- 240-250 ft-lb for a 3/4" Clearance Hole (10 TPI Bolt)

Torque values are laser etched along with bolt requirement



MRRA1

- Single use only - remove, bend or sheath over after using
- One person capacity
- Exceeds 5000lbs minimum breaking strength

Stainless steel permanent roof anchor -
One person capacity on each side -
Exceeds 5000lbs minimum breaking strength -

MSRA2



N5072F

- Reusable roof anchor
- One person capacity
- Exceeds 5000lbs minimum breaking strength

Reusable door/window anchor bar -
Available to fit regular or patio doors -
One person capacity -
Exceeds 5000lbs minimum breaking strength -

MADW / MAPD



MRTA001

- Permanent Tri Truss anchor
- Available for 2x4 or 2x6 trusses
- One person capacity
- Exceeds 5000lbs minimum breaking strength



MRGSxx1K

Our kits are designed to be a comprehensive personal fall arrest system to meet the needs of various industries. The kit is packaged in a 5 gallon pail with a Class A full body harness, rope lifeline, reusable roof anchor, energy absorbing lanyard and Class ADP panic rope grab.

R
O
O
F
E
R
S



MH1011110

- Lightweight polyester
- Fully adjustable
- CSA Class A



SRTxxA

- Available in many lengths
- 5/8in Polysteel rope
- Snap hook in a spliced eye

K
I
T
S



N5072F

- Reusable roof anchor
- Hinge lays flat
- D ring



MLSW130000

- 1 3/4in x 30in
- Polyester
- Energy absorbing
- Snap hooks at each end



PPRK020

- Plastic storage pail



RP7361

- Panic grab
- Large eye
- CSA Class ADP



Inspection and Cleaning Services for Harnesses, Lanyards and Anchor Slings


Cleaning is required to
expose defects before
inspecting

Failed items tagged and
labeled with reason for
failure

Passed items tagged with
inspection date

Detailed report returned
with equipment

Reports available online

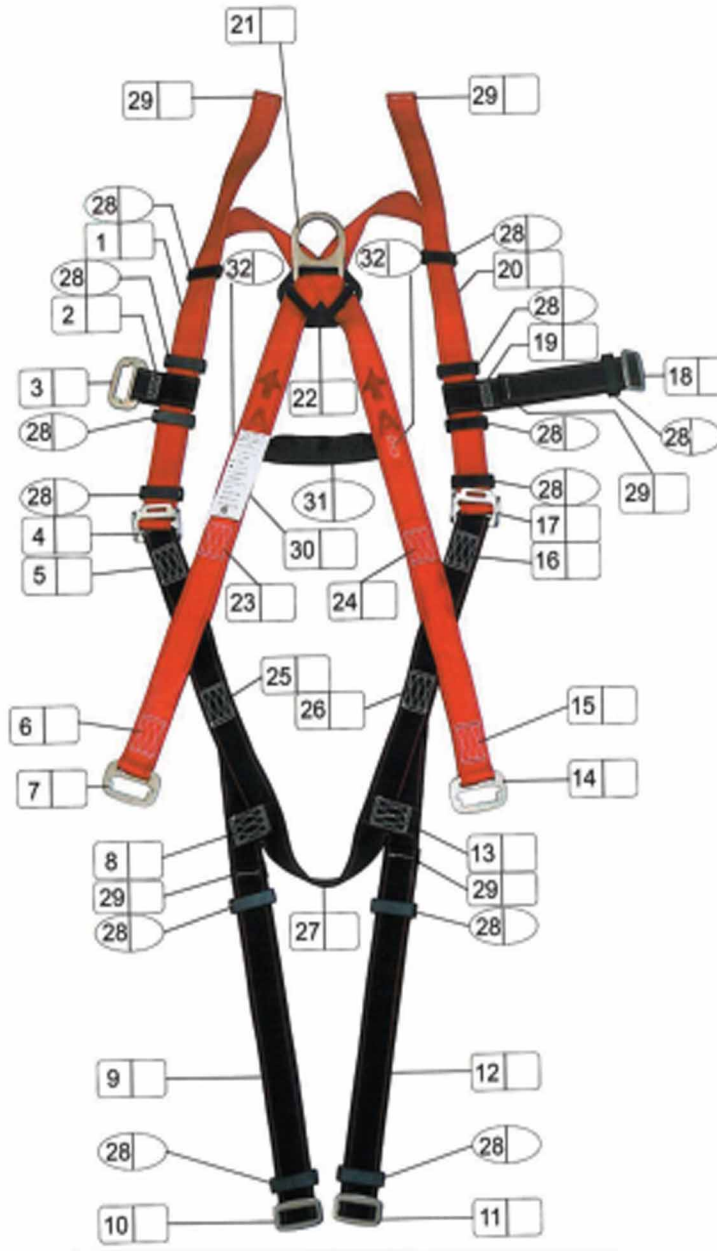

I
N
S
P
E
C
T
I
O
N
S



Pocket sized
inspection log
books for daily
tracking

CSA recommends that all fall protection equipment be
inspected yearly by a trained and competent individual.

SAFETY DIRECT LTD.

Fall Protection Equipment Manufacturer



#100, 2210 Premier Way
Sherwood Park, AB
T8H 2L2

Phone: (780) 464 - 7139

Fax: (780) 464 - 7652

E-Mail: inquiries@safetydirect.ca

Web: www.safetydirect.ca

PRODUCTS AND SERVICES

Harnesses

Lanyards

Roofers Kits

Roof Anchors

Anchor Straps

Rope / Lifelines

Tool Leashes

Retractable

Anchor Slings

Cleaning Services

Inspection Services

Loss Prevention

"Fall Protection You Can Live With"